

Garland's Pro Series range is the experts' choice for high quality cables.


Part No: TCW192BK

Description	Stranded 10AWG PACW, Figure 8 construction, PVC Insulation.
Applicable Standards	AS/NZS 1125, AS/NZS 3808
Suitable Applications	For the wiring of electronic and allied equipment, extension speakers, security system etc.

Cable Construction Drawing



Cable Construction Relative Parts

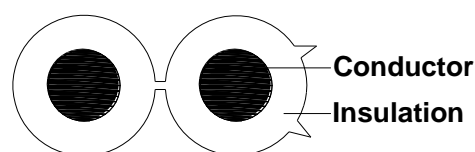

Cable Description

Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	10	192/0.19	5.44	3.51	PACW
Insulation	Cores : 2 Material : PVC Colour : Black Nominal Thickness (mm) : 1.0 Nominal OD (mm) : 5.6 x 13.0				



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Electrical Properties

Max. Conductor DC Resistance @ 20°C	3.3 Ω /km
Min. Insulation Resistance @ 20°C	50M Ω .km
Voltage Test: Conductor to core	1.5 kV ac/1min
Voltage Rating	ELV

Mechanical Properties

Operating Temperature Range	-15 to 70°C
Max. Recommended Pulling Tension	762N
Min. Bend Radius (install)	45mm
Approximate Mass	16kg/100m

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
100m	Wooden Reel	W28 x H21.8cm	1R	

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

TCW192BK-150331.docx

made by



madison