



garland  
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.


## Part No: SF17WHRD

Description	Solid 21AWG TACW, Figure 8 construction, V-90 PVC Insulation.
Applicable Standards	AS/NZS 1125, AS/NZS 3808
Suitable Applications	For the interconnection of detonators and related shot firing equipment.

### Cable Construction Drawing



### Cable Construction Relative Parts

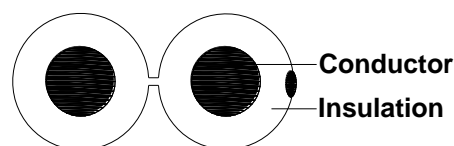

### Cable Description

Conductor	AWG	Area(mm <sup>2</sup> )	Stranding	Diameter(mm)	Material
	21	0.38	1/0.7	0.7	TACW
Insulation	Cores :		2		
	Material :		V-90 PVC		
	Colour :		White/Red Stripe		
	Nominal Thickness (mm) :		0.35		
	Nominal OD (mm) :		1.5 x 3.0		

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99  
www.garlandcables.com.au

363-SF17WHRD-151006.DOCX

made by





Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

### Electrical Properties

Voltage Rating	ELV
Max. Conductor DC Resistance @ 20°C	46.6 $\Omega$ /km
Min. Insulation Resistance @ 20°C	50M $\Omega$ .km
Voltage Test: Conductor to core	1.0 kV ac/1min

### Mechanical Properties

Operating Temperature Range	-15 to 90°C
Max. Recommended Pulling Tension	53N
Min. Bend Radius (install)	15mm
Approximate Mass	1.09kg/100m
Sheath Printing	N/A

### Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
100m	Plastic Reel	7 x 4.5 x 2 "	20R	
200m	Plastic Reel	7 x 4.5 x 4"		

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99  
[www.garlandcables.com.au](http://www.garlandcables.com.au)

363-SF17WHRD-151006.DOCX

