

RJ45 PATCH LEADS


CAT 6, PVC-V75 Sheath



Applications

Used for interconnection between patch panels, outlets and equipment.

Diagram

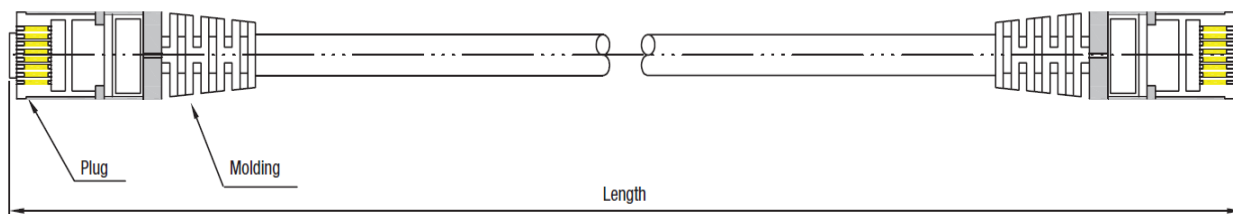

Construction

Conductor	Material	Bare Copper	
	Size	24 AWG	
Insulation	Thickness	MIN at any point	0.15mm
		Max Avg	0.25mm
	Diameter	1.03 ± 0.06mm	
Jacketing	Material	PVC	
	Thickness	MIN at any point	0.46
		Max Avg	0.54mm
	Diameter	5.9 ± 0.3mm	

RJ45 PATCH LEADS

CAT 6, PVC-V75 Sheath

Pinout

Pair	P1 (T568B) P2 (T568B)	Wire
1	1	White/ Orange
	2	Orange
2	3	White/ Green
	6	Green
3	4	Blue
	5	White/ Blue
4	7	White/ Brown
	8	Brown

Ordering Information¹

Length	0.5m	1.0m	2.0m	3.0m	5.0m	10.0m
Blue	MT6L45450.5BE-B	MT6L45451.0BE-B	MT6L45452.0BE-B	MT6L45453.0BE-B	MT6L45455.0BE-B	MT6L454510.0BE-B
White	MT6L45450.5WE-B	MT6L45451.0WE-B	MT6L45452.0WE-B	MT6L45453.0WE-B	MT6L45455.0WE-B	MT6L454510.0BE-B
Red	MT6L45450.5RD-B	MT6L45451.0RD-B	MT6L45452.0RD-B	MT6L45453.0RD-B	MT6L45455.0RD-B	MT6L454510.0RD-B
Yellow	MT6L45450.5YW-B	MT6L45451.0YW-B	MT6L45452.0YW-B	MT6L45453.0YW-B	MT6L45455.0YW-B	MT6L454510.0YW-B
Green	MT6L45450.5GN-B	MT6L45451.0GN-B	MT6L45452.0GN-B	MT6L45453.0GN-B	MT6L45455.0GN-B	MT6L454510.0GN-B
Grey	MT6L45450.5GY-B	MT6L45451.0GY-B	MT6L45452.0GY-B	MT6L45453.0GY-B	MT6L45455.0GY-B	MT6L454510.0GY-B
Pink	MT6L45450.5PK-B	MT6L45451.0PK-B	MT6L45452.0PK-B	MT6L45453.0PK-B	MT6L45455.0PK-B	MT6L454510.0PK-B
Violet	MT6L45450.5VT-B	MT6L45451.0VT-B	MT6L45452.0VT-B	MT6L45453.0VT-B	MT6L45455.0VT-B	MT6L454510.0VT-B
Orange	MT6L45450.5OE-B	MT6L45451.0OE-B	MT6L45452.0OE-B	MT6L45453.0OE-B	MT6L45455.0OE-B	MT6L454510.0OE-B
Black	MT6L45450.5BK-B	MT6L45451.0BK-B	MT6L45452.0BK-B	MT6L45453.0BK-B	MT6L45455.0BK-B	MT6L454510.0BK-B

- o Madison reserves the right to make changes to the products described in this specification without prior notice. All values subject to factory tolerances

¹ Other lengths available on special orders.