



garland  
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

LAN Cable


## Part No: UTPL6VT

Description	Solid 23AWG PACW, UTP, 4Pairs, Cross-web Separator, Rip Cord, PE Insulation, PVC Sheath.
Applicable Standards	UL444, TIA/EIA 568 C.2, AS/ACIF S008
Suitable Applications	For communication network applications needing up to gigabit networking speeds.

### Cable Construction Drawing



### Cable Construction Relative Parts

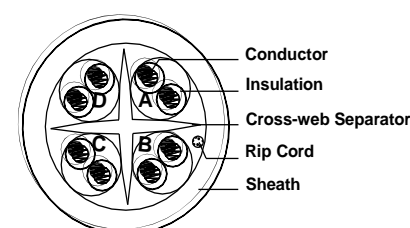

### Cable Description

Conductor	AWG	Stranding	Area(mm <sup>2</sup> )	Diameter(mm)	Material
	23	1/0.57	0.255	0.57	PACW
Insulation	Pairs : 4		Material : PE		
	Material :		Colour : Blue/White-Blue Stripe, Green/White-Green Stripe, Orange/White-Orange, Brown/White-Brown Stripe		
	Nominal Thickness (mm) : 0.2		Nominal OD (mm) : 1.		
Filler	Material : Cross-web Separator , Rip Cord				
Sheath	Material : PVC		Colour : Violet		
	Nominal Thickness (mm) : 0.58		Nominal OD (mm) : 6.2		

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99  
www.madisontech.com.au/garland

UTPL6VT-150529.docx

made by



madison



garland  
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Electrical Properties	
Max. Conductor DC Resistance @ 20°C	7.3 Ω/km
Max. DC Conductor resistance unbalanced	5%
Nominal Velocity of Propagation	64%
Characteristic Impedance(1-250MHz)	100±15 Ω
Nom. Mutual Capacitance @ 1KHz	56 pF/m
Max. Capacitance Unbalance @ 20°C	330 pF/100m
Voltage Test : Core to Core	1.5 kV ac/1min
Voltage Test : Core to Sheath	3.0 kV ac/1min

Frequency (MHz)	Min. RL (dB/100m, 20°C)	Max. IL (dB/100m, 20°C)	Min. NEXT (dB/100m, 20°C)	Min. PSNEXT (dB/100m, 20°C)	Min. ELFEXT (dB/100m, 20°C)	Min. PS ELFEXT (dB/100m, 20°C)	Min. LCL (dB/100m, 20°C)	VOP %	Max. PD (ns/100m, 20°C)	Max. PDS (ns/100m, 20°C)
0.150	-----	-----	86.7	84.7	-----	-----	-----	-----	-----	-----
0.772	-----	1.8	76.0	74.0	70.0	67.0	-----	-----	-----	-----
1.0	20.0	2.03	74.3	72.3	67.8	64.8	40	58.5	570	45
4.0	23.01	3.78	65.27	62.27	55.76	52.76	40	-----	-----	-----
8.0	24.52	5.32	60.75	58.75	49.74	46.74	40	-----	-----	-----
10.0	25.0	5.95	59.3	57.3	47.8	44.8	40	54.5	545	45
16.0	25.0	7.55	56.24	54.24	43.72	40.72	38	-----	-----	-----
20.0	25.0	8.47	54.78	52.78	41.78	38.78	37	-----	-----	-----
25.0	24.32	9.5	53.33	51.33	39.84	36.84	36	-----	-----	-----
31.25	23.64	10.67	51.88	49.88	37.9	34.9	35.1	-----	-----	-----
62.5	21.54	15.38	47.36	45.36	31.88	28.88	32.0	-----	-----	-----
100	21.11	19.8	44.3	42.3	27.8	24.8	30.0	538	538	45
155	21.0	-----	-----	-----	-----	-----	-----	-----	-----	-----
200	18.0	28.98	39.78	37.78	21.78	18.78	27.0	-----	-----	-----
250	17.32	32.85	38.33	36.33	19.84	16.84	26.0	536	536	45

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99  
www.madisontech.com.au/garland

UTPL6VT-150529.docx

made by



madison



garland  
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

#### Mechanical Properties

Operating Temperature Range	-15 to 70°C
Max. Recommended Pulling Tension	142N
Min. Bend Radius (install)	62mm
Approximate Mass	4.64kg/100m

#### Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
305m	Plastic Reel	W36 x 26.6cm	1R	27

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**  
[www.madisontech.com.au/garland](http://www.madisontech.com.au/garland)

UTPL6VT-150529.docx

made by



madison